



techhose

QUALITY CONNECTIONS

Hydraulics

Pneumatics
& Vacuum

Industrial

Compressed Air
& Ring Main

Process &
Instrumentation

Fuelling, Lubrication, Wash Down & Misting

Pressure Wash Lances & Triggers

WASH DOWN EQUIPMENT



Pressure Washer Lances

- Inlet connection: 3/8" BSPP
- Maximum flow: 25 L/min
- 15° spray pattern nozzle

Maximum Working Temperature:
+150°C

Maximum Working Pressure:
280 bar

Hand grip options: moulded or vented.
Lance style options: straight or 15° bend.
Length options: 430-900mm.

Straight Moulded Grip

1369	Thread	Length mm	Max Pressure Bar
PRESSURE-LANCESH	3/8"	430	250
PRESSURE-LANCE	3/8"	900	280

15° Moulded Grip


1369	Thread	Length mm	Max Pressure Bar
PRESSURE-LANCE15	3/8"	900	280

Straight, Vented Grip

1369	Thread	Length mm	Max Pressure Bar
PRESSURE-L500V	3/8"	500	280
PRESSURE-L635V	3/8"	635	280
PRESSURE-L760V	3/8"	760	280
PRESSURE-L900V	3/8"	900	280

15° Vented Grip

1369	Thread	Length mm	Max Pressure Bar
PRESSURE-L15500V	3/8"	500	280
PRESSURE-L15635V	3/8"	635	280
PRESSURE-L15760V	3/8"	760	280
PRESSURE-L15900V	3/8"	900	280

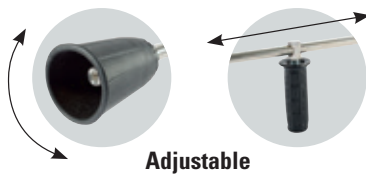

Maximum Working Temperature:
+150°C

Maximum Working Pressure:
280 bar

Solid Moulded Hand Grip, BSPP

1369	Thread	Length mm
CD-2502	3/8"	900

Vented Moulded Hand Grip, BSPP

1369	Thread	Length mm
CD-2501	3/8"	900



- Inlet connection: 3/8" BSPP
- Maximum flow: 40 L/min
- Solid moulded or vented hand grips
- Nozzle holder and protector

- 15° spray pattern nozzle
- 900mm lance length
- Adjustable high/low pressure nozzle
- Extra hand grip allows the user more control of the spray

Pressure Washer Trigger & Lance Assemblies

Maximum Working Temperature:
+150°C

Flow: 40 L/min

High Flow, Short Lance, BSPP



1369	Thread	Length mm	Max Pressure Bar
PWLA1	3/8"	400	310

Flow: 40 L/min

High Flow, Long Lance, BSPP



1369	Thread	Length mm	Max Pressure Bar
PWLA2	3/8"	900	250

Flow: 25 L/min

Low Flow, Twin Lance with Top Control, BSPP



1369	Thread	Length mm	Max Pressure Bar
PWLA3	3/8"	1060	280

Flow: 30 L/min

High Flow, Twin Lance with Top Control, BSPP



1369	Thread	Length mm	Max Pressure Bar
PWLA4	3/8"	1060	310

Flow: 25 L/min

Low Flow, Twin Lance with Handle, BSPP



1369	Thread	Length mm	Max Pressure Bar
PWLA5	3/8"	1060	280

Flow: 40 L/min

High Flow, Twin Lance with Handle, BSPP



1369	Thread	Length mm	Max Pressure Bar
PWLA6	3/8"	1060	345

Flow: 25 L/min

stainless steel

Low Flow, Twin Stainless Steel Lance with Top Control, BSPP



1369	Thread	Max Pressure Bar
PWLA7	3/8"	280

Flow: 40 L/min

stainless steel

High Flow, Twin Stainless Steel Lance with Handle, BSPP



1369	Thread	Max Pressure Bar
PWLA8	3/8"	250

Flow: 25 L/min

stainless steel

Low Flow, Twin Stainless Steel Lance with Handle, BSPP



1369	Thread	Max Pressure Bar
PWLA9	3/8"	280

Flow: 40 L/min

stainless steel

High Flow, Twin Stainless Steel Lance, with Top Control, BSPP



1369	Thread	Max Pressure Bar
PWLA10	3/8"	250

Wash Down Lance & Trigger

Our high pressure water assembly has a 900mm zinc plated straight lance, single moulded hand grip, nozzle holder and protector.

Maximum Flow: 40

Maximum Working Temperature:
+150°C

Maximum Working Pressure:
310 bar

High Pressure, High Flow, Long Lance, BSPP



1369	Thread	Length mm	Max Pressure Bar
1002-0038	3/8"	900	310

Please note: Nozzles not included. See page 1674 for nozzles.

Pressure Lance Configurator



PWAA-14F



PWAA-14M

See page 1673



PWAB-14M



21-051



21-049



PWAB-14F



PWAB-22MM



PWAB-22FF

See page 1673



CDQ1500



CDQ1900



CDQ1600



CDQ2100



ST7



ST900



SW-ST4



SW-ST6

See page 1670



CDE

See page 1675



BC-13



BA-16



BD-20



CDBB-20



BMG-20



CDBJ-20



CDBU-42



CDBV-42

See page 1671



CDAZ

See page 1675

PWFC-20

CDO

CDL

See page 1675

FGB-1

See page 1672

CDN

CDM

See page 1675

SSTLTC

SSTLH

ZPTLH

ZPTLTC

SL-2

SL-3

SL-5

SL-7

SL-10

SL-12

See page 1672

CDQP001-14

CDH004

CDQC-14

CDH006

9203L

CDH002

9202L

CDC-14F-14M-B

CDH005

SJN-2-045

CDH001

RSJN-2-045

See pages 1659 & 1674

2021-8061

2020-2982

A00050

9203L

9202L

See pages 1673-1674

WASH DOWN EQUIPMENT



Pressure Wash Lance Triggers

Maximum Working Temperature:
+150°C

Maximum Working Pressure:
280 bar



BSPP, 25 L/min

1369	Inlet Thread	Outlet Thread
ST900	3/8"	1/4"

Maximum Working Temperature:
+150°C

Maximum Working Pressure:
280 bar



BSPP, 40 L/min, Soft Grip

1369	Inlet Thread	Outlet Thread
CDQ1500	3/8"	1/4"

Maximum Working Temperature:
+150°C

Maximum Working Pressure:
310 bar



BSPP, 30 L/min, High Pressure

1369	Inlet Thread	Outlet Thread
ST-5	3/8"	1/4"

Maximum Working Temperature:
+150°C

Maximum Working Pressure:
280 bar



BSPP, 25 L/min

1369	Inlet Thread	Outlet Thread
CDQ1900	3/8"	1/4"

Maximum Working Temperature:
+150°C

Maximum Working Pressure:
345 bar



BSPP, 45 L/min, In-line

1369	Inlet Thread	Outlet Thread
CDQ2100	3/8"	1/4"

Maximum Working Temperature:
+150°C


Maximum Working Pressure:
345 bar



BSPP, 45 L/min

1369	Inlet Thread	Outlet Thread
CDQ1600	3/8"	1/4"

Pressure Wash Lance Swivel Triggers

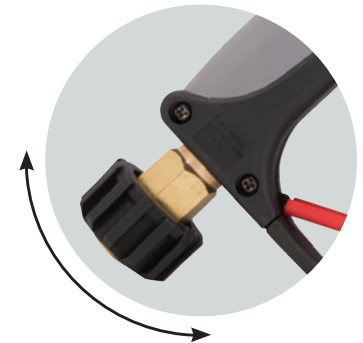

Maximum Working Temperature:
+150°C

Maximum Working Pressure:
345 bar



Metric, 40 L/min

1369	Inlet Thread	Outlet Thread
ST-7	M22 x 1.5 Female	M22 x 1.5 Female

Maximum Working Temperature:
+150°C

Maximum Working Pressure:
280 bar



BSPP, 25 L/min

1369	Inlet Thread	Outlet Thread
SW-ST4	3/8"	1/4"

Maximum Working Temperature:
+150°C

Maximum Working Pressure:
280 bar



BSPP, 40 L/min

1369	Inlet Thread	Outlet Thread
SW-ST6	M22 x 1.5 Male	1/4"

Extended Lances, 1/4" BSPT Male Inlet/Outlet



Maximum Working Temperature:
+150°C
 Maximum Working Pressure:
280 bar

Straight Vented Grip, 30 L/min

1369	Length mm
BD-20	500
BD-25	635
BD-30	760
BD-36	900



Maximum Working Temperature:
+150°C
 Maximum Working Pressure:
280 bar

Angled Moulded Grip, 45 L/min

1369	Length mm
CDBJ-20	500
CDBJ-25	635
CDBJ-30	760
CDBJ-36	900

Extended Lances, 1/4" Male Inlet x M22 Female Outlet



Maximum Working Temperature:
+150°C
 Maximum Working Pressure:
250 bar

Straight Vented Grip, 80 L/min

1369	Length mm
BA-16	405
BA-18	457
BA-20	508



Maximum Working Temperature:
+150°C
 Maximum Working Pressure:
280 bar

Angled Vented Grip, 45 L/min

1369	Length mm
CDBB-20	500
CDBB-25	635
CDBB-30	760
CDBB-36	900



Maximum Working Temperature:
+150°C
 Maximum Working Pressure:
280 bar

Angled Twin Moulded Grip, 30 L/min

1369	Length mm
CDBU-42	1065
CDBU-47	1190
CDBU-50	1270



Maximum Working Temperature:
+150°C
 Maximum Working Pressure:
280 bar

Straight Moulded Grip, 45 L/min

1369	Length mm
BC-13	330
BC-15	380
BC-18	457
BC-20	508



Maximum Working Temperature:
+150°C
 Maximum Working Pressure:
280 bar

Straight Moulded Grip, 45 L/min

1369	Length mm
BMG-20	500
BMG-25	635
BMG-30	760
BMG-36	900



Maximum Working Temperature:
+150°C
 Maximum Working Pressure:
280 bar

Straight Twin Moulded Grip, 80 L/min

1369	Length mm
CDBV-42	1065
CDBV-47	1190
CDBV-50	1270

M22 Extension & Nozzle



Maximum Working Temperature:
+60°C
 Maximum Working Pressure:
150 bar

Adjustable M22 Male Extension, 25 L/min

1369	Length mm
CDBL-15	375

WASH DOWN EQUIPMENT



Twin Pressure Washer Lances

Maximum Working Temperature: +60°C
Maximum Working Pressure: 250 bar

Flow: 35 L/min

stainless steel



Stainless Steel Twin Lance with Top Control, BSPP

1369	Thread
SSTLC	1/4"

Flow: 45 L/min

stainless steel



Stainless Steel Twin Lance with Handle, BSPP

1369	Thread
SSTLH	1/4"

Flow: 45 L/min



Zinc Plated Twin Lance with Handle, BSPP

1369	Thread
ZPTLH	1/4"

Flow: 45 L/min



Zinc Plated Twin Lance with Top Control, BSPP

1369	Thread
ZPTLC	1/4"

Pressure Washer Lances

All supplied with 1/4" female thread nozzle holder and protector. 1/4" male thread inlet.

Maximum Working Temperature: +150°C
Maximum Working Pressure: 250 bar

Maximum Flow: 40 L/min



Straight with Moulded Grip Zinc Plated

1369	Length mm	No of Grips
SL-2	900	1



Bent End with Moulded Grip Zinc Plated

1369	Length mm	No of Grips
SL-3	900	1
SL-4	1200	2



Bent End with Hollow Grip Zinc Plated

1369	Length mm	No of Grips
SL-5	700	1



Bent End with Vented Grip Zinc Plated

1369	Length mm	No of Grips
SL-7	900	1
SL-8	900	2



stainless steel

Bent End with Moulded Grip Stainless Steel

1369	Length mm	No of Grips
SL-11	1200	1



stainless steel

Straight with Moulded Grip Stainless Steel

1369	Guard Type	Length mm	No of Grips
SL-13	Slide on	900	1

Heavy-duty Foam Injection Bottle

- Heavy-duty foam injection bottle connects easily to your existing pressure washer lance or gun.
- Foam bottle sprays foam all over the vehicle creating the "snow bath effect".
- 1/4" BSPP male inlet connection.
- 1 litre bottle.
- 1/4" x 1/4" adaptor removable for ease. Other adaptors can be fitted.
- Variable angle spray pattern nozzle.
- Adjustable detergent displacement.

Maximum Working Temperature: +60°C

Maximum Working Pressure: 275 bar



Male, BSPP

1369	Thread
FGB-1	1/4"